

Q-174



SVE BULLETIN

SPECIAL VEHICLE ENGINEERING – BODY BUILDERS ADVISORY SERVICE

E-Mail via website: www.fleet.ford.com/truckbbas (click "Contact Us")

Toll-free: (877) 840-4338

QVM Bulletin: Q-174

Date: Oct 7, 2008

2009 E-Series Upfitter Switches

Models Affected

2009 Model Year E-250/350/450.

Purpose

To utilize Ford Upfitter switches on 2009 E-Series Vans

Description


The Ford upfitter switches are optional instrument panel mounted switches (Option Code **52S**) that control passenger compartment side mounted relays. These relay power four blunt cut wires that are taped to the harness in the engine compartment. The four blunt cut wires are as follows:

Switches	Circuit #	Wire Color	Fuse Size
Aux 1	CAC05	Yellow	30A
Aux 2	CAC06	Green/Brown	30A
Aux 3	CAC07	Violet/Green	10A
Aux 4	CAC08	Brown	15A

Operating Procedure

The Upfitter Switches are operational when the ignition key is in the "RUN" position only. The power to the switches is relay controlled and was designed to operate in the "RUN" mode to reduce the possibility of draining the battery(ies).

Circuit Access Location

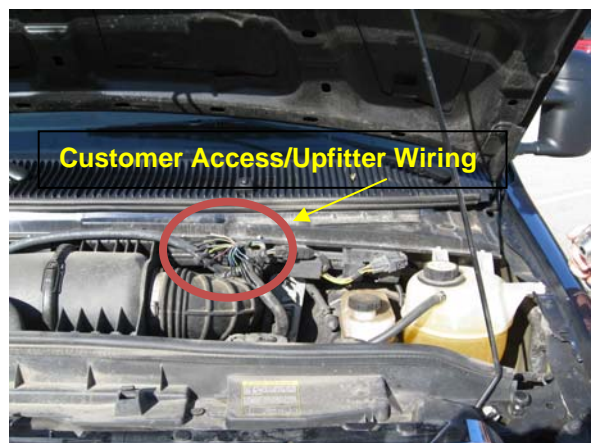

If you have any questions, please contact the Ford Truck Body Builders Advisory Service as shown in the header of this bulletin.